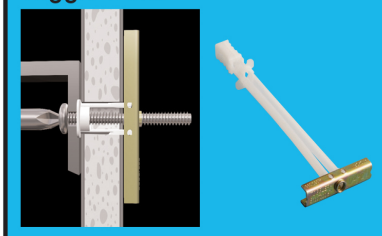

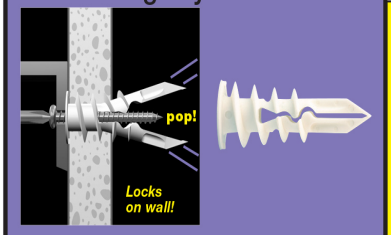
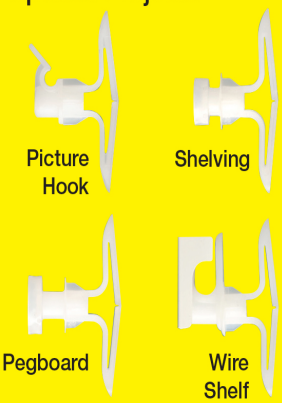
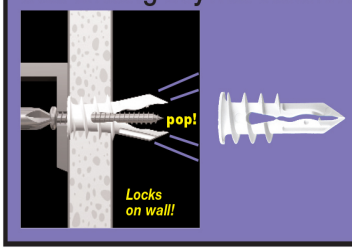
TOGGLER®

High-Performance™ Anchors

Fast, easy & secure anchoring in *ALL* building materials


	Hollow Materials *Drywall, Plaster, Block...*	Solid Materials *Concrete, Brick, Stone...*	
HEAVY Duty Large TV's, Mirrors, Bookshelves, Sinks, Cabinets...	**SNAPTOGGLE®** Toggle Bolts 	**ALLIGATOR®** Solid-Wall Anchors 	**HEAVY Duty** Lighting fixtures, Plumbing fixtures, Partitions, Grab bars, Shelving, Cabinets...
MEDIUM Duty Bathroom accessories, Window treatments, Speaker mounts...	**TOGGLER®** Plastic Toggle Anchors 		**to LIGHT Duty** Alarms, Thermostats, Smoke detectors...
MEDIUM - LIGHT Duty Small lighting fixtures, Picture frames...	**SnapSkru® Regular** Self-Drilling Drywall Anchors 	**In All Walls ... Hollow *and* Solid ... Drywall to Concrete** **TOGGLER® Anchors for Special Projects** 	
LIGHT Duty Alarms, Thermostats, Smoke detectors...	**SnapSkru® *MINI*** Self-Drilling Drywall Anchors 		

www.toggler.co.nz


Ray Staiger Limited P. 07 850 4200 F. 07 850 4204 E. rsl@simplefix.co.nz www.simplefix.co.nz

ALLIGATOR® Solid-Wall Anchors


Heavy-duty anchoring in concrete & brick ... even in tile!




Drill hole same diameter as anchor. Push in anchor and tap flush.



Place item over anchor, insert screw and tighten flush with item.



Anti-rotation fins prevent spinning while the ALLIGATOR anchor expands along the screw in solid walls ... up to ***2x*** its original length.




In unexpected cavities or in hollow walls (hollow brick, hollow block, tile over drywall, etc.), the screw opens the anchor and its thread locks into the anchor's teeth.

Benefits:

- ***Strongest***—holds up to **2x more** than metal, adhesive, epoxy, and chemical anchors*
- Anchor **bonds screw** to concrete, brick & stone—***sealing the hole*** [prevents moisture from entering hole]
- Sets instantly • Non-toxic • Rustproof • No-shelf life worry
- Resists **vibration & shock** in **both** solid & hollow walls
- Can use a screw gun—anti-rotation fins **prevent spinning**
- ***Greatest*** **screw range** for each anchor: [see Specifications chart below]
- **More versatile** than metal or chemical anchors—holds securely even in ***hollow walls / ceilings***

* with the same screw diameter and embedment depth

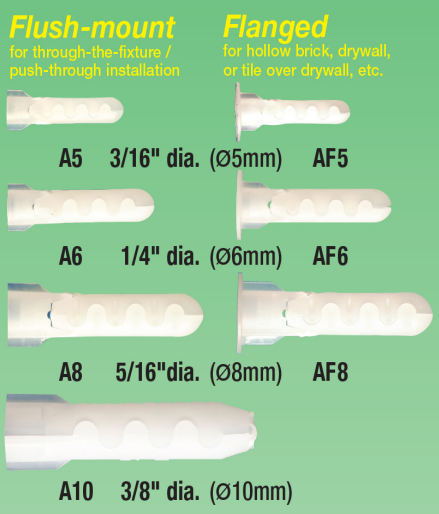

Ultimate Load in Pounds

Anchor & drill dia.:	3/16"	1/4"	5/16"	3/8"
Anchor:	A5/AF5	A6/AF6	A8/AF8	A10
	Tensile			
4000 psi Concrete	2,316	2,633	3,083	4,270
1/2" Drywall	57	69	85	N/A
	Shear			
1/2" Drywall	125	153	171	N/A

Specifications:

	UNC			
Anchor:	A5/AF5	A6/AF6	A8/AF8	A10
Anchor & drill diameter:	3/16"	1/4"	5/16"	3/8"
Screw sizes:	#4 - #10	#6 - #14	#8 - 5/16"	#10 - 3/8"
Minimum hole depth:	1½"	1¾"	2"	2½"
	Metric			
Anchor & drill diameter:	5mm	6mm	8mm	10mm
Screw sizes:	Ø3 - 5mm	Ø3.5 - 6mm	Ø4 - 8mm	Ø4.5 -10mm
Minimum hole depth:	40mm	45mm	50mm	65mm

For Maximum Holding in:

- Concrete
- Brick
- Stone
- Masonry
- Cinder block
- Aerated concrete
- Wood
- Stucco
- Plaster
- Tile
- Drywall
- Greenboard
- RTA furniture
- Foam insulated panels

Ideal for Mounting:

- Electrical equipment
- Lighting fixtures
- Plumbing fixtures
- Partitions
- Hand rails & grab bars
- Telephone equipment
- Shelving
- Cabinets
- Awnings
- Circuit breakers
- Framing
- Alarms
- Signs
- DSS antennas
- Fire extinguishers
- Window frames
- Door jambs
- Transformers
- Storefront gates
- Smoke detectors

www.toggler.co.nz

Ray Staiger Limited P. 07 850 4200 F. 07 850 4204 E. rsl@simplefix.co.nz www.simplefix.co.nz