

PIPE CLAMPS

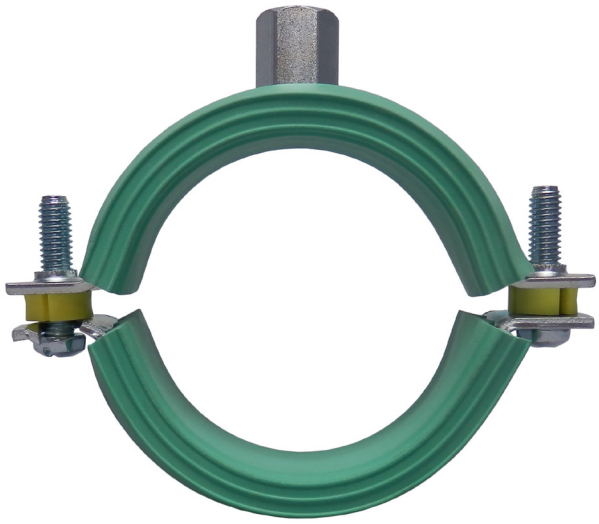


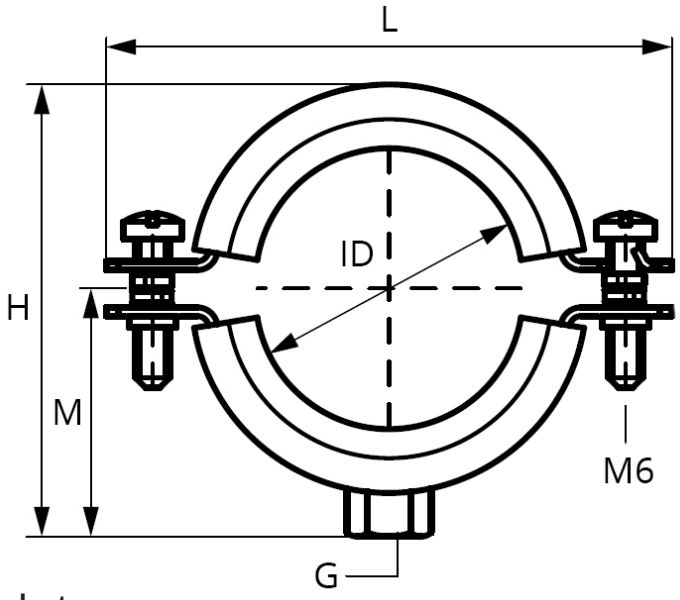

BIS Bifix 5000 Rubber Lined Zinc Plated Holderbats

RSL CODE	SIZE	L	W x T	H	M	G	BOLT	REC LOAD
MRING16	16id	58	20 x 1.25	37	22	M10	M6 x 15	22kg (0.22kN)
MRING20	20id	63	20 x 1.25	49	29	M10	M6 x 20	22kg (0.22kN)
MRING25	25id	68	20 x 1.25	51	31	M10	M6 x 20	22kg (0.22kN)
MRING32	32id	75	20 x 1.25	63	36	M10	M6 x 25	22kg (0.22kN)
MRING40	40id	83	20 x 1.25	70	40	M10	M6 x 20	28kg (0.28kN)
MRING50	50id	92	20 x 1.50	76	43	M10	M6 x 20	28kg (0.28kN)
MRING56-58	56-58id	102	20 x 2.00	88	51	M8/M10	M6 x 25	132kg (1.30kN)
MRING63	63id	109	20 x 2.00	94	51	M10	M6 x 25	59kg (0.58kN)
MRING75	75id	117	23 x 1.50	106	55	M10	M6 x 25	81kg (0.80kN)
MRING75-78	75-78id	122	23 x 1.50	111	63	M8/M10	M6 x 25	132kg (1.30kN)
MRING90	90id	140	23 x 2.00	120	60	M10	M6 x 25	150kg (1.47kN)
MRING110	110id	157	23 x 2.00	140	73	M10	M6 x 25	150kg (1.47kN)
MRING125	125id	169	23 x 2.00	152	81	M10	M6 x 25	150kg (1.47kN)
MRING135	135id	178	23 x 2.00	167	90	M8/M10	M6 x 30	153kg (1.50kN)
MRING160	160id	203	23 x 2.00	188	98	M10	M6 x 25	150kg (1.47kN)
MRING200	200id	247	25 x 3.00	247	127	M10	M6 x 35	150kg (1.47kN)

walraven

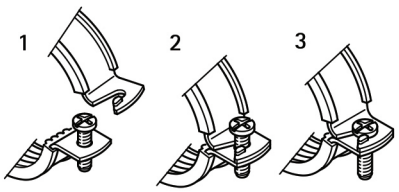

- Two-screw clamp with quick locking system
- Removable spacer washers
- Noise insulating lining (EPDM) tested according to DIN 4109
- Lining is age resistant and suitable for applications with plastic pipes.
- Lining is flush to improve sliding of pipe in clamp
- RAL tested, certified and externally monitored according to RAL-GZ 655/B.

RAL GÜTEZEICHEN
ROHRBEFESTIGUNG
RAL-GZ 655/B
Cert.Nr. 2005-11